



PROGRAMMABLE,
SMART & CONTRACTOR-BRANDED
THERMOSTATS

THERMOSTATS



THE BRANDS YOU TRUST FROM THE BRAND YOU RELY ON!

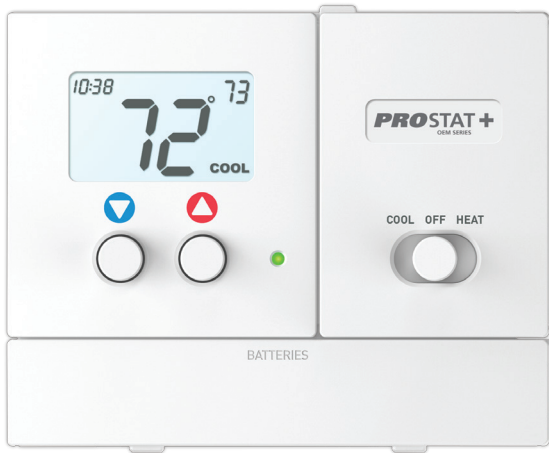


Table of Contents

| | |
|---|----|
| Value Series Thermostats | 2 |
| Premium Mini Thermostat | 4 |
| Premium Residential Thermostats | 6 |
| Premium Commercial Thermostats | 9 |
| Touch Screen Residential Thermostats | 11 |
| Touch Screen Commercial Thermostats | 12 |
| Contractor Branding | 13 |
| Thermostat Features | 15 |
| Thermostat Cross Reference | 16 |



Value Series Thermostats



Non-Programmable* Gas/Electric or Heat Pump no AUX

PSP1100 – 1 Heat / 1 Cool

5+2 Day Programmable* Gas/Elec or Heat Pump no AUX

PSP1152 – 1 Heat / 1 Cool

Accessories

| | |
|----------|----------------------------|
| PSPAC-WP | Wall Plate (7.0 W x 5.3 H) |
|----------|----------------------------|



*Complete warranty details available from your local branch.


PSP1100 Features

| | |
|---------|---|
| STAGING | <ul style="list-style-type: none"> • Non-adjustable first stage deadband of 2° F |
| WIRING | <ul style="list-style-type: none"> • Compatible with 2, 3, or 4 wire systems • RC and RH terminals • Battery or system powered |
| DISPLAY | <ul style="list-style-type: none"> • Large temperature display on easy to read screen • Fahrenheit or celsius readouts |
| HOUSING | <ul style="list-style-type: none"> • White thermostat housing • Easy access front battery compartment • Bi-color LED indicator glows green for cooling and red for heating |

PSP1152 Features

| | |
|----------|---|
| PROGRAMS | <ul style="list-style-type: none"> • 5+2 day programmable with up to 4 time periods per day • Program switch to turn program OFF or set to RUN |
| STAGING | <ul style="list-style-type: none"> • Adjustable first stage deadband (1° - 6° F) • Adjustable cycle timer for cooling and heating run cycles (10 - 60 mins or Defeated for zoning applications, etc.) |
| WIRING | <ul style="list-style-type: none"> • Compatible with 2, 3, or 4 wire systems • RC and RH terminals • Battery or system powered |
| DISPLAY | <ul style="list-style-type: none"> • Large temperature display on easy to read screen • Fahrenheit or celsius readouts • Service filter indicator |
| HOUSING | <ul style="list-style-type: none"> • White thermostat housing • Easy access front battery compartment • Bi-color LED indicator glows green for cooling and red for heating |

Thermostat feature comparisons and cross reference on pages 15-16

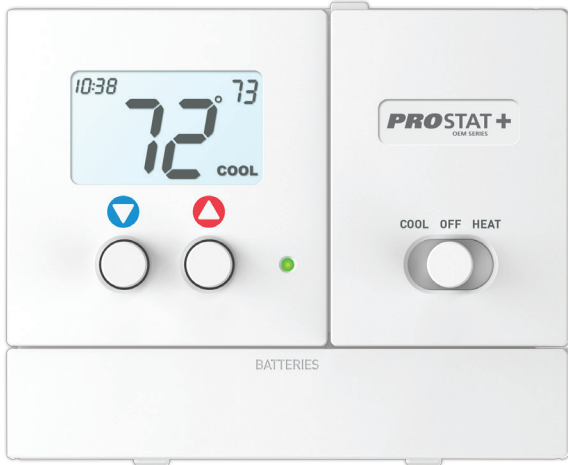

Non-Programmable*
Heat Pump with AUX

PSP2100 – 2 Heat / 1 Cool

5+2 Day Programmable*
Heat Pump with AUX

PSP2152 – 2 Heat / 1 Cool



*Complete warranty details available from your local branch.

PSP2100 Features

| | |
|---------|---|
| STAGING | <ul style="list-style-type: none"> AUX Heat Switch to Lockout Strip Heat or Lockout 1st stage heat (emergency heat) Non-adjustable first stage deadband of 2° F |
| WIRING | <ul style="list-style-type: none"> Battery or system powered No common wire required |
| DISPLAY | <ul style="list-style-type: none"> Large temperature display on easy to read screen Fahrenheit or celsius readouts |
| HOUSING | <ul style="list-style-type: none"> White thermostat housing Easy access front battery compartment Bi-color LED indicator glows green for cooling and red for heating |


PSP2152 Features

| | |
|----------|--|
| PROGRAMS | <ul style="list-style-type: none"> 5+2 day programmable with up to 4 time periods per day Program Switch to turn program OFF or set to RUN |
| STAGING | <ul style="list-style-type: none"> AUX Heat Switch to Lockout Strip Heat or Lockout 1st Stage Heat (Emergency Heat) Adjustable first stage deadband (1° - 6° F) Adjustable cycle timer for cooling and heating run cycles (10 - 60mins or Defeated for zoning applications, etc.) |
| WIRING | <ul style="list-style-type: none"> Battery or system powered No common wire required |
| DISPLAY | <ul style="list-style-type: none"> Large temperature display on easy to read screen Fahrenheit or celsius readouts Service filter indicator |
| HOUSING | <ul style="list-style-type: none"> White thermostat housing Easy access front battery compartment Bi-color LED indicator glows green for cooling and red for heating |

Thermostat feature comparisons and cross reference on pages 15-16



Premium Mini Thermostats

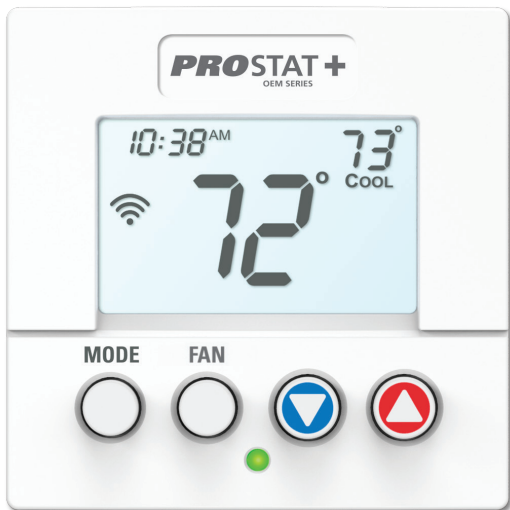

7 Day Programmable* Wi-Fi Built-in

PSP2270 – 2 Heat / 2 Cool

Accessories

| | |
|-------------|-------------------------------------|
| PSPAC-WFMS | Wi-Fi Mini Sensor |
| PSPAC-WPM-S | Small Wall Plate (4.62 W x 4.81 H) |
| PSPAC-WPM-M | Medium Wall Plate (7.12 W x 4.37 H) |
| PSPAC-WPM-L | Large Wall Plate (6.25 W x 6.17 H) |


PSP2270 Features

| | |
|----------|---|
| PROGRAMS | <ul style="list-style-type: none"> • 7-Day, 5+1+1 day or 1-day programmable with up to 4 time periods per day • Geofencing • Smart recovery auto-adjusts morning start time to meet setpoint by programmed start time • Vacation mode |
| STAGING | <ul style="list-style-type: none"> • Independently adjustable staging deadbands for all stages of heating and cooling (1° - 10° F) • Independently adjustable staging timers for all stages of heating and cooling (1 - 60 mins) • Adjustable staging turnoffs, i.e. de-energize 2nd stage at deadband or keep active until setpoint |
| SECURITY | <ul style="list-style-type: none"> • Setpoint limiting • Keypad lock • Secure API (http or https) |
| SENSORS | <ul style="list-style-type: none"> • Wireless (Wi-Fi) remote sensors available • Remote sensor averaging with thermostat sensor |
| ALERTS | <ul style="list-style-type: none"> • Dry contact input for twist timers, etc. or... • Condensate overflow warning systems – lockout compressor with display message • FDD (Equipment Fault Protection) notification • Initiate vacation mode |
| CERTS | <ul style="list-style-type: none"> • Title 24 compliant • Energy Star certified |

Thermostat feature comparisons and cross reference on pages 15-16



*Complete warranty details available from your local branch.

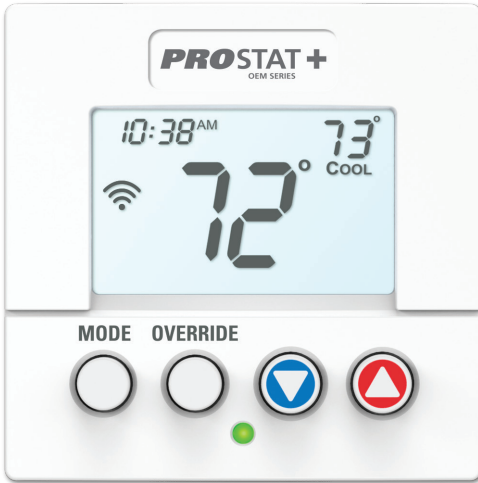

7 Day Programmable*
Wi-Fi Built-in

PSP2270C – 2 Heat / 2 Cool Multi-Stage

Accessories

| | |
|-------------|-------------------------------------|
| PSPAC-WFMS | Wi-Fi Mini Sensor |
| PSPAC-WPM-S | Small Wall Plate (4.62 W x 4.81 H) |
| PSPAC-WPM-M | Medium Wall Plate (7.12 W x 4.37 H) |
| PSPAC-WPM-L | Large Wall Plate (6.25 W x 6.17 H) |

PSP2270C Features

| | |
|----------|---|
| PROGRAMS | <ul style="list-style-type: none"> • 7-Day, 5+1+1 day or 1-day programmable with up to 3 occupied and 1 unoccupied time periods per day • Smart recovery auto-adjusts Occ 1 start time to meet setpoint by programmed start time • Holiday mode |
| STAGING | <ul style="list-style-type: none"> • Independently adjustable staging deadbands for all stages of heating and cooling (1° - 10° F) • Independently adjustable staging timers for all stages of heating and cooling (1 - 60 mins) • Adjustable staging turnoffs, i.e. de-energize 2nd stage at deadband or keep active until setpoint |
| SECURITY | <ul style="list-style-type: none"> • Setpoint limiting • Keypad lock • Secure API (http or https) |
| SENSORS | <ul style="list-style-type: none"> • Wireless (Wi-Fi) remote sensors available • Remote sensor averaging with thermostat sensor |
| ALERTS | <ul style="list-style-type: none"> • Dry contact input for twist timers, etc. or... • Condensate overflow warning systems – lockout compressor with display message • FDD (Equipment Fault Protection) notification • Initiate holiday mode |
| CERTS | <ul style="list-style-type: none"> • Title 24 compliant • Energy Star certified |


Thermostat feature comparisons and cross reference on pages 15-16



*Complete warranty details available from your local branch.



Premium Residential Thermostats

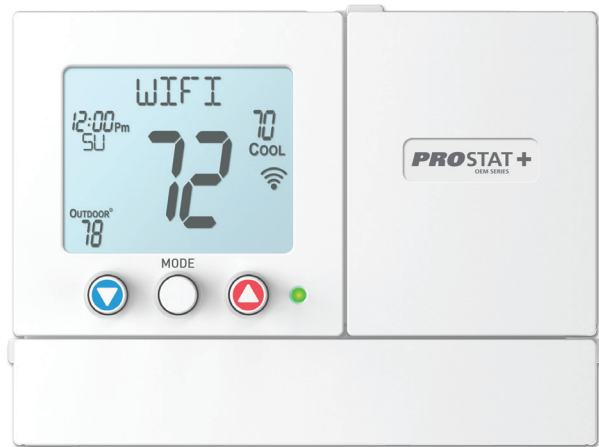

7 Day Programmable/ 4 Time Periods per Day

PSP2111 – 2 Heat / 1 Cool

Accessories

| | |
|-----------|------------------------------------|
| PSPAC-PWF | Wi-Fi Module |
| PSPAC-OS | Wired Outdoor Sensor |
| PSPAC-WP | Premium Wall Plate (7.0 W x 5.3 H) |


PSP2111 Features

| | |
|----------|---|
| PROGRAMS | <ul style="list-style-type: none"> • 7-Day, 5+1+1 day or 1-day programmable with up to 4 time periods per day • Vacation mode • Geofencing with PSPAC-PWF Wi-Fi module |
| STAGING | <ul style="list-style-type: none"> • Adjustable first stage deadband (1° - 6° F) • Fixed 2° second stage deadband |
| DISPLAY | <ul style="list-style-type: none"> • Choice of English, Spanish, or French • Bi-color LED indicates heating or cooling • Adjustable backlight intensity • Backlit, color coded buttons and legends |
| SECURITY | <ul style="list-style-type: none"> • Keypad lock • Secure API (http or https) w/ PSPAC-PWF module |
| SENSORS | <ul style="list-style-type: none"> • Outdoor sensor ready with Hi/Low readouts for the day |
| ALERTS | <ul style="list-style-type: none"> • Dry contact input for twist timers, etc. or . . . • Condensate overflow warning systems – lockout compressor with display message • FDD (Equipment Fault Protection) notification • Initiate vacation mode |
| CERTS | <ul style="list-style-type: none"> • Title 24 compliant with PSPAC-PWF Wi-Fi module • Energy Star certified with PSPAC-PWF Wi-Fi module |

*Thermostat feature comparisons
and cross reference on pages 15-16*



*Complete warranty details available from your local branch.

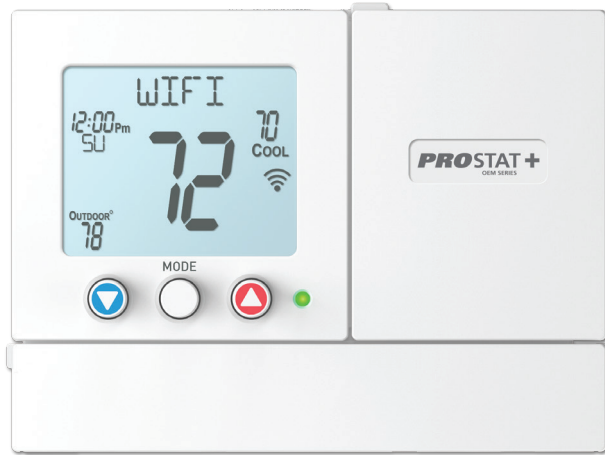

7 Day Programmable*
Remote Sensor Compatible

PSP4272 – 4 Heat / 2 Cool

Accessories

| | |
|------------|------------------------------------|
| PSPAC-PWF | Wi-Fi Module |
| PSPAC-WFMS | Wi-Fi Mini Sensor |
| PSPAC-OS | Wired Indoor/Outdoor Sensor |
| PSPAC-DS | Wired Duct Sensor |
| PSPAC-WP | Premium Wall Plate (7.0 W x 5.3 H) |

PSP4272 Features

| | |
|----------|---|
| PROGRAMS | <ul style="list-style-type: none"> • 7-Day, 5+1+1 day or 1-day programmable with up to 4 time periods per day • Vacation mode • Geofencing with PSPAC-PWF Wi-Fi module |
| STAGING | <ul style="list-style-type: none"> • Independently adjustable staging deadbands for all stages of heating and cooling (1° - 10° F) • Independently adjustable staging timers for all stages of heating and cooling (1 - 60 mins) • Adjustable staging turnoffs, i.e. de-energize 2nd stage at deadband or keep active until setpoint |
| SECURITY | <ul style="list-style-type: none"> • Setpoint limiting • Keypad lock • Secure API (http or https) w/ PSPAC-PWF module |
| FAN OPS | <ul style="list-style-type: none"> • Programmable fan runs 5 - 60 mins per hour with adjustable Start/Stop times • Smart recovery auto-adjusts morning start time to meet setpoint by programmed start time |
| SENSORS | <ul style="list-style-type: none"> • Control to or monitor a 2nd temp sensor - Baby's room or game room, etc. • Outdoor sensor ready with Hi/Low readouts for the day |
| ALERTS | <ul style="list-style-type: none"> • Dry contact input for twist timers, etc. or... • Condensate overflow warning systems - lockout compressor with display message • FDD (Equipment Fault Protection) notification • Initiate vacation mode |
| CERTS | <ul style="list-style-type: none"> • Title 24 compliant with PSPAC-PWF Wi-Fi module • Energy Star certified with PSPAC-PWF Wi-Fi module |


Thermostat feature comparisons and cross reference on pages 15-16



*Complete warranty details available from your local branch.



Premium Residential Thermostats

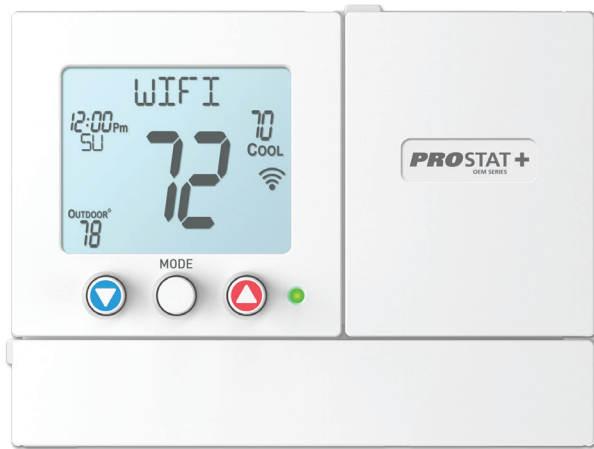

7 Day Programmable* Humidity Control

PSP4273 – 4 Heat / 2 Cool

Accessories

| | |
|------------|------------------------------------|
| PSPAC-PWF | Wi-Fi Module |
| PSPAC-WFMS | Wi-Fi Mini Sensor |
| PSPAC-OS | Wired Indoor/Outdoor Sensor |
| PSPAC-DS | Wired Duct Sensor |
| PSPAC-WP | Premium Wall Plate (7.0 W x 5.3 H) |




*Complete warranty details available from your local branch.

PSP4273 Features

| | |
|----------|--|
| IAQ | <ul style="list-style-type: none"> Controls hum, dehum, and reheat (hot gas or AUX) Programmable AUX output Ventilation control with programmable schedule Fresh air ventilation |
| PROGRAMS | <ul style="list-style-type: none"> 7-Day, 5+1+1 day or 1-day programmable with up to 4 time periods per day Vacation mode Geofencing with PSPAC-PWF Wi-Fi module |
| STAGING | <ul style="list-style-type: none"> Dual fuel compatible with ultra-low balance point Independently adjustable staging deadbands for all stages of heating and cooling (1° - 10° F) Independently adjustable staging timers for all stages of heating and cooling (1 - 60 mins) Adjustable staging turnoffs, i.e. de-energize 2nd stage at deadband or keep active until setpoint |
| SECURITY | <ul style="list-style-type: none"> Setpoint limiting Keypad lock Secure API (http or https) w/ PSPAC-PWF module |
| FAN OPS | <ul style="list-style-type: none"> Programmable fan runs 5 - 60 mins per hour with adjustable Start/Stop times Smart recovery auto-adjusts morning start time to meet setpoint by programmed start time |
| SENSORS | <ul style="list-style-type: none"> Control to or monitor a 2nd temp sensor Baby's room or game room, etc. Remote sensor averaging with thermostat sensor |
| ALERTS | <ul style="list-style-type: none"> Separately tracks up to 2,000 hours of heating, AUX heat, and cooling runtime Dry contact input for twist timers, etc. or... Condensate overflow warning systems – lockout compressor with display message FDD (Equipment Fault Protection) notification |
| CERTS | <ul style="list-style-type: none"> Title 24 compliant with PSPAC-PWF Wi-Fi module Energy Star certified with PSPAC-PWF Wi-Fi module |

Thermostat feature comparisons and cross reference on pages 15-16

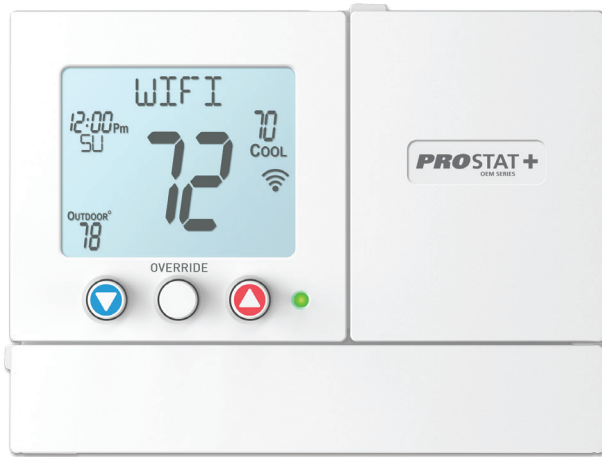

7 Day Programmable*
4 Time Periods per Day

PSP4271C – 4 Heat / 2 Cool

Accessories

| | |
|-----------|------------------------------------|
| PSPAC-PWF | Wi-Fi Module |
| PSPAC-LR | Lock Ring for Premium Commercial |
| PSPAC-OS | Wired Outdoor Sensor |
| PSPAC-WP | Premium Wall Plate (7.0 W x 5.3 H) |

PSP4271C Features

| | |
|----------|---|
| PROGRAMS | <ul style="list-style-type: none"> • 7-Day, 5+1+1 day or 1-day programmable with up to 3 occupied and 1 unoccupied periods per day • Random start ensures staggered equip. starts • Standard holiday mode or 365-day holiday programming with PSPAC-PWF Wi-Fi module |
| STAGING | <ul style="list-style-type: none"> • Independently adjustable staging deadbands for all stages of heating and cooling (1° - 10° F) • Independently adjustable staging timers for all stages of heating and cooling (1 - 60 mins) • Adjustable staging turnoffs, i.e. de-energize 2nd stage at deadband or keep active until setpoint |
| SECURITY | <ul style="list-style-type: none"> • Setpoint limiting • Keypad lock • Lock box security with PSPAC-LR locking ring • Secure API (http or https) w/ PSPAC-PWF module |
| FAN OPS | <ul style="list-style-type: none"> • Smart fan operation runs continuous during Occupied; only for heat or cool during Unoccupied • Smart recovery auto-adjusts Occ 1 start time to meet setpoint by programmed start time |
| SENSORS | <ul style="list-style-type: none"> • Outdoor sensor ready with Hi/Low readouts for the day |
| ALERTS | <ul style="list-style-type: none"> • Dry contact input for twist timers, etc. or... • Condensate overflow warning systems – lockout compressor with display message • FDD (Equipment Fault Protection) notification |
| CERTS | <ul style="list-style-type: none"> • Title 24 compliant with PSPAC-PWF Wi-Fi module • Energy Star certified with PSPAC-PWF Wi-Fi module |


Thermostat feature comparisons and cross reference on pages 15-16



*Complete warranty details available from your local branch.



Premium Commercial Thermostats

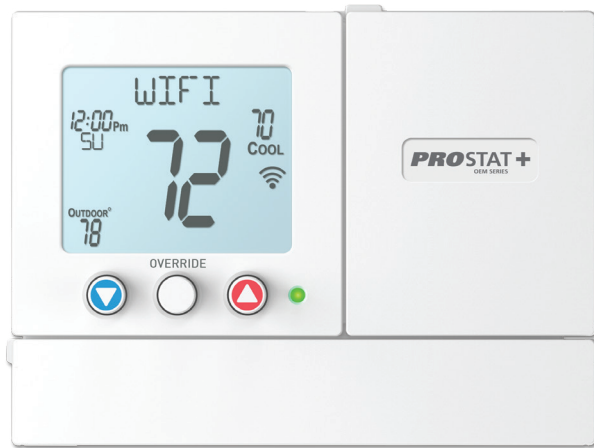

7 Day Programmable* Humidity Control

PSP4272C – 4 Heat / 2 Cool

Accessories

| | |
|------------|------------------------------------|
| PSPAC-PWF | Wi-Fi Module |
| PSPAC-WFMS | Wi-Fi Mini Sensor |
| PSPAC-LR | Lock Ring for Premium Commercial |
| PSPAC-OS | Wired Indoor/Outdoor Sensor |
| PSPAC-DS | Wired Duct Sensor |
| PSPAC-WP | Premium Wall Plate (7.0 W x 5.3 H) |




*Complete warranty details available from your local branch.

PSP4272C Features

| | |
|----------|---|
| IAQ | <ul style="list-style-type: none"> Controls hum, dehum, and reheat (hot gas or AUX) Programmable AUX output Ventilation control with programmable schedule Fresh air ventilation |
| PROGRAMS | <ul style="list-style-type: none"> 7-Day, 5+1+1 day or 1-day programmable with up to 3 occupied and 1 unoccupied periods per day Random Start ensures staggered equip. starts Optional light activated Occ/Unocc time periods Standard holiday mode or 365-day holiday programming with PSPAC-PWF Wi-Fi module |
| STAGING | <ul style="list-style-type: none"> Independently adjustable staging deadbands for all stages of heating and cooling (1° - 10° F) Independently adjustable staging timers for all stages of heating and cooling (1 - 60 mins) Adjustable staging turnoffs, i.e. de-energize 2nd stage at deadband or keep active until setpoint |
| SECURITY | <ul style="list-style-type: none"> Setpoint limiting Keypad lock Lock box security with PSPAC-LR locking ring Secure API (http or https) w/ PSPAC-PWF module |
| FAN OPS | <ul style="list-style-type: none"> Smart fan operation runs continuous during Occupied; only for heat or cool during Unoccupied Pre-occupancy fan purge, up to 3hrs before start Smart recovery auto-adjusts Occ 1 start time to meet setpoint by programmed start time |
| SENSORS | <ul style="list-style-type: none"> Control to or monitor a 2nd temp sensor - Supply air or computer room, etc. Remote sensor averaging with thermostat sensor |
| ALERTS | <ul style="list-style-type: none"> Separately tracks up to 2,000 hours of heating, AUX heat, cooling, and override runtime Dry contact input for twist timers, etc. or... Condensate overflow warning systems - lockout compressor with display message FDD (Equipment Fault Protection) notification |
| CERTS | <ul style="list-style-type: none"> Title 24 compliant with PSPAC-PWF Wi-Fi module Energy Star certified with PSPAC-PWF Wi-Fi module IECC2018 compliant |

Thermostat feature comparisons and cross reference on pages 15-16

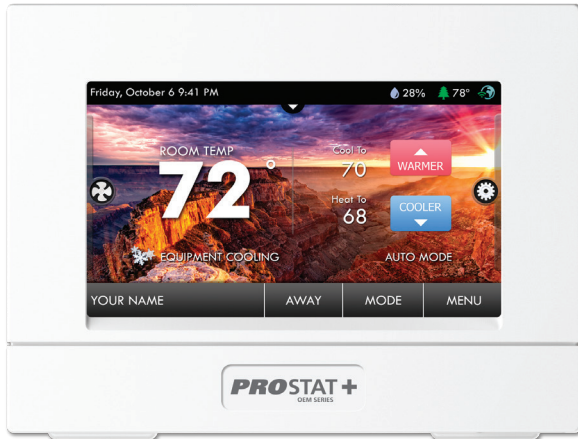

7 Day Programmable*
Wi-Fi Built-in

PSP4272RT – 4 Heat / 2 Cool

7 Day Programmable*
Humidity Control

PSP4273RT – 4 Heat / 2 Cool

Accessories

| | |
|------------|------------------------------------|
| PSPAC-WFMS | Wi-Fi Mini Sensor |
| PSPAC-OS | Wired Indoor/Outdoor Sensor |
| PSPAC-DS | Wired Duct Sensor |
| PSPAC-WPT | Premium Wall Plate (7.0 W x 5.5 H) |



*Complete warranty details available from your local branch.

PSP4272RT and PSP4273RT Features

| | |
|----------|--|
| IAQ | <ul style="list-style-type: none"> • Programmable AUX output (PSP4273RT only) - Humidification - Dehumidification with reheat (PSP4273CT only) - 3rd or 4th stage of heating • Drop down current weather and forecast screen |
| PROGRAMS | <ul style="list-style-type: none"> • 7-Day, 5+1+1 day or 1-day programmable with up to 4 time periods per day • Geofencing • Vacation mode |
| STAGING | <ul style="list-style-type: none"> • Dual fuel compatible with ultra-low balance point • Independently adjustable staging deadbands for all stages of heating and cooling (1° - 10° F) • Independently adjustable staging timers for all stages of heating and cooling (1 - 60 mins) • Adjustable staging turnoffs, i.e. de-energize 2nd stage at deadband or keep active until setpoint |
| SECURITY | <ul style="list-style-type: none"> • Setpoint limiting • Customizable keypad lock • Secure API (http or https) |
| FAN OPS | <ul style="list-style-type: none"> • Programmable fan runs 5 - 60 mins per hour with adjustable Start/Stop times. 7-day programmable. • Smart recovery auto-adjusts morning start time to meet setpoint by programmed start time |
| SENSORS | <ul style="list-style-type: none"> • Wireless (Wi-Fi) remote sensors available • Remote sensor averaging with thermostat sensor • Supply air alerts for heating and cooling cycles |
| ALERTS | <ul style="list-style-type: none"> • Separately tracks up to 2,000 hours of heating, AUX heat, and cooling runtime • FDD (Equipment Fault Protection) notification • Email alerts: Supply Air, Hi/Lo Temp, Service Filter, Hi/Lo Humidity (PSP4273RT only), etc. |
| CERTS | <ul style="list-style-type: none"> • Title 24 compliant • Energy Star certified |

Thermostat feature comparisons and cross reference on pages 15-16



TouchScreen Commercial Thermostats



7 Day Programmable* Wi-Fi Built-in

PSP4272CT – 4 Heat / 2 Cool

7 Day Programmable* Humidity Control

PSP4273CT – 4 Heat / 2 Cool

Accessories

| | |
|------------|------------------------------------|
| PSPAC-WFMS | Wi-Fi Mini Sensor |
| PSPAC-OS | Wired Indoor/Outdoor Sensor |
| PSPAC-DS | Wired Duct Sensor |
| PSPAC-WPT | Premium Wall Plate (7.0 W x 5.5 H) |



*Complete warranty details available from your local branch.

PSP4272CT and PSP4273CT Features

| | |
|----------|---|
| IAQ | <ul style="list-style-type: none"> • Programmable AUX output (PSP4273CT only) <ul style="list-style-type: none"> - Humidification - Dehumidification with reheat - 3rd or 4th stage of heating • Drop down current weather and forecast screen |
| PROGRAMS | <ul style="list-style-type: none"> • 7-Day, 5+1+1 day or 1-day programmable with up to 4 time periods per day • Smart recovery auto-adjusts Occ 1 start time to meet setpoint by programmed start time • Random start ensures staggered equip. starts • 365-day holiday programming |
| STAGING | <ul style="list-style-type: none"> • Independently adjustable staging deadbands for all stages of heating and cooling (1° - 10° F) • Independently adjustable staging timers for all stages of heating and cooling (1 - 60 mins) • Adjustable staging turnoffs, i.e. de-energize 2nd stage at deadband or keep active until setpoint |
| SECURITY | <ul style="list-style-type: none"> • Setpoint limiting • Customizable keypad lock • Secure API (http or https) |
| FAN OPS | <ul style="list-style-type: none"> • Smart fan operation runs continuous during Occupied; only for heat or cool during Unoccupied • Pre-occupancy fan purge, up to 3hrs before start |
| SENSORS | <ul style="list-style-type: none"> • Remote sensor averaging with thermostat sensor • Wireless (Wi-Fi) remote sensors available • Control to or monitor a temp sensor <ul style="list-style-type: none"> - Supply air or computer room, etc. |
| ALERTS | <ul style="list-style-type: none"> • Separately tracks up to 2,000 hours of heating, AUX heat, and cooling runtime • FDD (Equipment Fault Protection) notification • Email alerts: Supply Air, Hi/Lo Temp, Hi/Lo Humidity, Service Filter, etc.. |
| CERTS | <ul style="list-style-type: none"> • Title 24 compliant • Energy Star certified |

Thermostat feature comparisons and cross reference on pages 15-16



FREE Contractor Branded Thermostat Badges

The **ProStat+**™ Contractor Branding program is completely free with no minimum purchase requirements.

Receive 25* high quality lexan badges that can be laser imprinted with your dealer logo and contact information.

Let the **ProStat+** badge advertise your company information so customers know who to call when it is time for maintenance or equipment repair.



Easy Ordering

Laser printed badges

1. Fill out the Contractor Branding form on the next page of this document and email it to: **ContractorBranding@PSPthermostats.com**
2. Upon receiving your order confirmation, 25* high quality lexan badges will be shipped to the address you provide absolutely **FREE** — no setup fees or branding charges.
3. Please allow 6 weeks for standard delivery or expedited delivery in 2 weeks with a \$25.00 service charge.

* Additional badges available upon request



Full graphic laser printing on lexan badges with permanent adhesive backing

For more information, contact your local **ProStat+** distributor.



Contractor Branding Services Order Form

Email the information requested in the form below along with a hi-res JPEG or PNG of your logo to **ContractorBranding@PSPthermostats.com** and a digital proof will be emailed back within 24-48 hours.

CONTRACTOR REQUESTING SERVICES:

DISTRIBUTOR:

COMPANY NAME

DISTRIBUTOR NAME

CONTACT NAME

CONTACT NAME

ADDRESS

ADDRESS

CITY STATE ZIP CODE

CITY STATE ZIP CODE

PHONE NUMBER

PHONE NUMBER

EMAIL

EMAIL

Ship to Contractor Location

Ship to Distributor Location

INCLUDE COMPANY PHONE NUMBER ON THE BADGE?

INCLUDE COMPANY EMAIL ON THE BADGE?

Thermostat Model (select all that apply)

- PSP1100, PSP1152, PSP2100, PSP2152
- PSP2270, PSP2270C
- PSP2111, PSP4272, PSP4273
- PSP4271C, PSP4272C
- PSP4272RT, PSP4273RT
- PSP4272CT, PSP4273CT



| | PSP1100 | PSP1152 | PSP2100 | PSP2152 | PSP2270 | PSP2270C | PSP2111 | PSP4272 | PSP4273 | PSP4271C | PSP4272C | PSP4272RT | PSP4273RT | PSP4272CT | PSP4273CT | | |
|--------------------------------------|----------------------------------|---------|---------|---------|---------|----------|---------|---------|---------|----------|----------|-----------|-----------|-----------|-----------|-----|---|
| STAGING | Conventional | 1/1 | 1/1 | | | 2/2 | 2/2 | 2/1 | 4/2 | 4/2 | 4/2 | 4/2 | 4/2 | 4/2 | 4/2 | 4/2 | |
| | Heat Pump | 1/1 | 1/1 | 2/1 | 2/1 | 2/2 | 2/2 | 2/1 | 4/2 | 4/2 | 4/2 | 4/2 | 4/2 | 4/2 | 4/2 | 4/2 | |
| PROGRAM | 7 Day | | | | | • | • | • | • | • | • | • | • | • | • | • | |
| | 5-2 Day | | • | | • | | | • | • | • | • | • | • | • | • | • | |
| | Non-Prog. | • | | • | | | | • | • | • | • | • | • | • | • | • | |
| APPLICATION | Electric | • | • | | | • | • | • | • | • | • | • | • | • | • | • | |
| | Gas or Oil | • | • | | | • | • | • | • | • | • | • | • | • | • | • | |
| | Heat Pump | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | |
| | Millivolt | • | • | | | | | | | | | | | | | | |
| | Battery / Hardwire | • | • | • | • | | | | | | | | | | | | |
| | Wi-Fi (*= optional accessory) | | | | | • | • | •* | •* | •* | •* | •* | • | • | • | • | |
| | | | | | | | | | | | | | | | | | |
| FUNCTIONS AND FEATURES | Display Size (sq. in.) | 1.9 | 1.9 | 1.9 | 1.9 | 2.4 | 2.4 | 3 | 3 | 3 | 3 | 3 | 4.3 | 4.3 | 4.3 | 4.3 | |
| | Blue Backlight | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | |
| | Adjustable Differential(s) | | • | | • | • | • | • | • | • | • | • | • | • | • | • | |
| | Permanent Memory | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | |
| | Adaptive Recovery Mode (ARM™) | | | | | • | • | | | • | • | | • | • | | | |
| | Geofencing | | | | | • | • | • | • | • | | | • | • | | | |
| | Works with Alexa and Google Home | | | | | • | • | • | • | • | • | • | • | • | • | • | |
| | Prog. Circ Fan | | | | | | | | • | | • | | | | | | |
| | Service Monitor(s) | | • | | • | • | • | • | • | • | • | • | • | • | • | • | • |
| | Auto Changeover | | • | | • | • | • | • | • | • | • | • | • | • | • | • | |
| | Keypad Lockout | | | | | • | • | • | • | • | • | • | • | • | • | • | |
| | Temperature Limits | | | | | • | • | • | • | • | • | • | • | • | • | • | |
| | Indoor/Outdoor Remote Sensing | | | | | • | • | | • | • | | • | • | • | • | • | |
| | Dual Fuel Capable | | | | | | | | | • | | | • | • | | | |
| | Balance Points | | | | | | | | | • | | | • | • | | | |
| | Humidity Control | | | | | | | | | • | | • | | • | | • | |
| | Economizer Control | | | | | | | | | | • | | | | | | |
| | IECC 2018 Compliant | | | | | | | | | | | • | | | | | |
| | Energy Star | | | | | • | • | • | • | • | • | • | • | • | • | • | • |
| | Title 24 Compliant | | | | | • | • | • | • | • | | | • | • | • | • | |
| Title 24 "Occupant System" Compliant | | | | | | | | | | • | • | | | | | | |






Thermostat Cross Reference

| ProStat Model | Honeywell® Model | Emerson® Model | Pro1® Model | Lux® Model |
|------------------------|--|---|--------------------------------|---|
| PSP1100 | TH110DV TH1110DH TH1110D TH3110D | 1E78-144 1F78-144 1F86-0244 1F86EZ-0251 | T601-02 T701 | PSD111 PSD011B P111 |
| PSP1152 | TH2110DV TH2110DH TH4110D TH4110U* | 1E78-151 1F78-151 1F80-361 1F80-0224 1F80-0261 | T605 T705 | P521U PH521 PSP511LC P711 |
| PSP2100 | TH1210DV TH1210DH TH3210D | 1F79-111 1F89-0211 1F89EZ-0251 | T621-2 T721 | PSDH121 PSDH021W |
| PSP2152 | TH2210DV TH2210DH TH4210D TH4210U | 1E78-151 1F78-151 1F80-361 1F80-0224 1F80-0261 | T715 T725 | P621U P721 P722U PSP721U |
| PSPS2111 | P621U P721 P722U PSP721U | 1F86-0471 1F80-0471 1F85-0422 1F83C-11NP 1F83H-21NP 1F83C-11PR 1F83H-21PR | T801 T805 | PSPS711 |
| PSP2270 PSP2270C | TH6220WF* TH6320WF* | 1F86U-42WF | T701i | GEO-WH KONO Z KONO SMART |
| PSP4272 PSP4273 | TH5220D TH5320U TH6220D TH6220U* TH6320U* | 1F83-0422 1F83-0471 1F85-0477 1F95EZ-0671 1F95-0680* 1F95-0671 1F95-0671 1F85U-22NP 1F85U-42NP* 1F85U-22PR 1F85U-42PR* | T755 T755S T855 T855S | PSP722E PSP711TS PSPU721T PSPU732T P721UT |
| PSP4271C | 7350A1004/U | 1F95-0680 | - | - |
| PSP4272C | T7350B1002/U T7350D1008 T7351F2010 TB7220U1012 TB8220U1003 | 1F95EZ-0671 | - | - |
| PSP4272RT PSP4272CT | TH8110R TH8320R TH8320WF* | 1F97-1277 1F95-1277 1F95-1280* | T855i T905 T955 T955S | GEO-WH KONO Z KONO SMART |
| PSP4272C | TH8321R TH8321WF* THX9321R | 1F95-1291 | - | - |

* Verify specific feature requirements before substitution. Product specifications may change without notice.

HVAC Pros rely on the ProStat+™ brand for customer satisfaction.

PROSTAT+

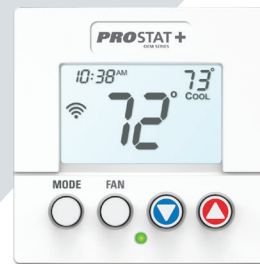

Visit your local branch or check out our website at www.ProStatPlusHVAC.com.

PROSTAT+
OEM SERIES

THE BRANDS YOU TRUST FROM THE BRAND YOU RELY ON!

©2021 PROPARTS • All Rights Reserved. All trademarks are the property of their respective owners.



PRO TO GO!

THE BRANDS YOU TRUST FROM THE BRAND YOU RELY ON!